

Catalog for Rock Drill

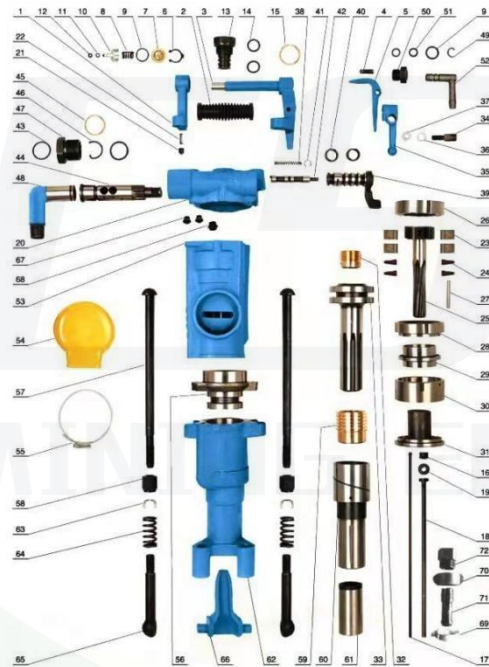


CHANGSHA MINING EQUIPMENT CO., LTD.

No.266 Honglian Road,Yuhua District,Changsha City,China

Product Description

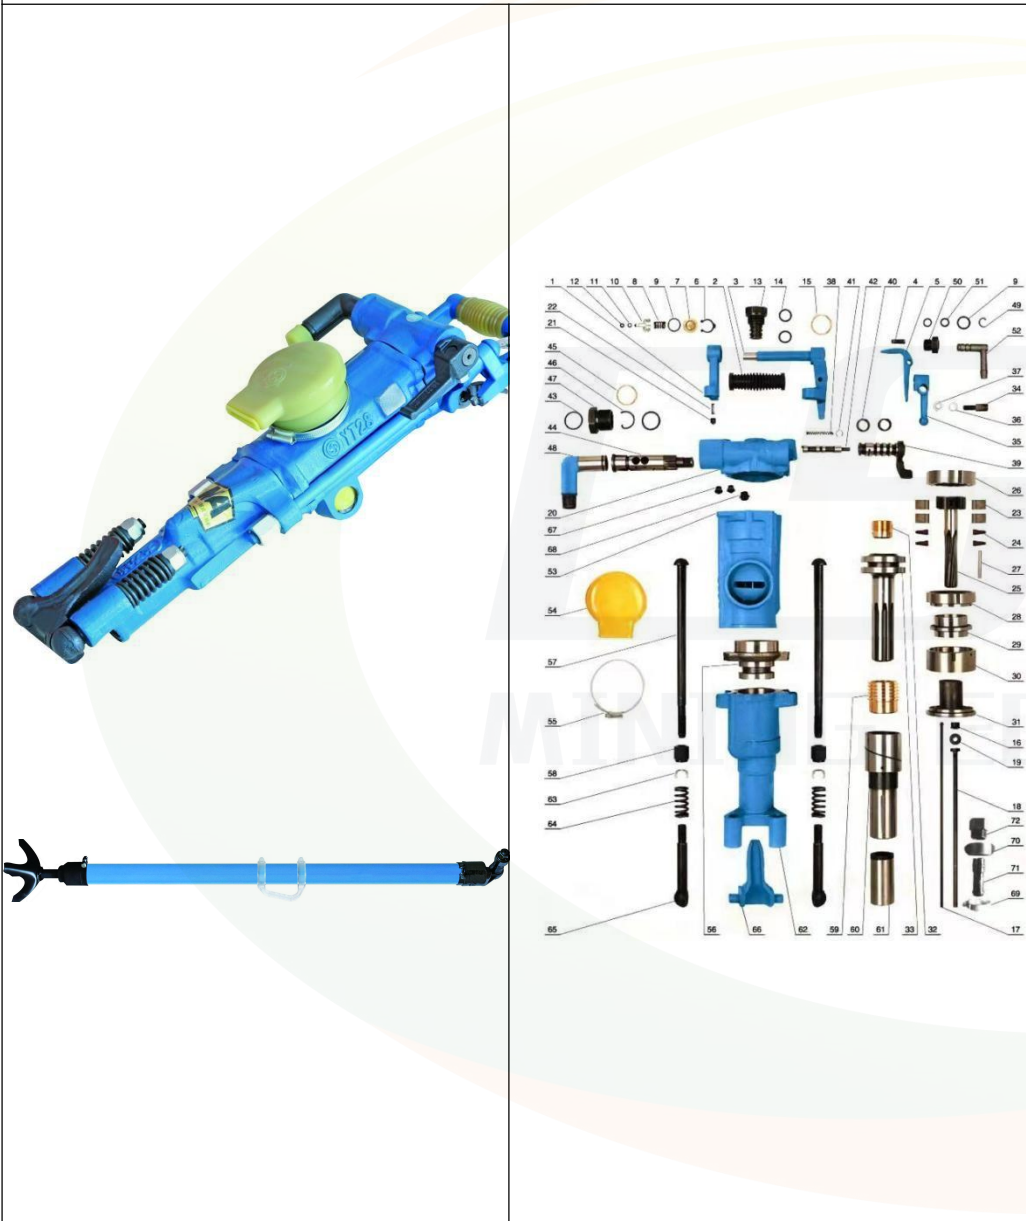
Item 1 YT27 Air Leg Rock Drill



Reference FOB price	Parameters
US \$300-580/ Set	Weight 27kg
Min Order	Physical size(LWH) 668X248X202mm
1set	Cylinder Diameter 80mm
Port	Piston Structure Stroke 60mm
Any China Port	Working Pressure 0.4-0.63MPa
Production Capacity	Drilling Impact Frequency $\geq 37\text{Hz}$
5000pieces per month	Impact Energy $\geq 75.5\text{J}$
Payment Terms	Drilling air Consumption $\leq 88\text{L/s}$
L/C T/T Western Union	Torque $\geq 20\text{N.m}$
Bit Type	Air Pipe Diameter 25mm
Cone Bit	Water Pipe Diameter 13mm
Drilling Way	Appropriate drilling Hole Diameter 34~42mm
Rotary	Suitable for maximum hole depth 5m
Power Type	Working Temperature $-30\sim 50^{\circ}\text{C}$
Pneumatic	Bit Shank Specification H22*108 \pm 1mm
Packing	FY250 Oil Injector Weight 1.2kg
Cartoon or wooden box	FY250 Oil Injector Oil Reserver 0.25L

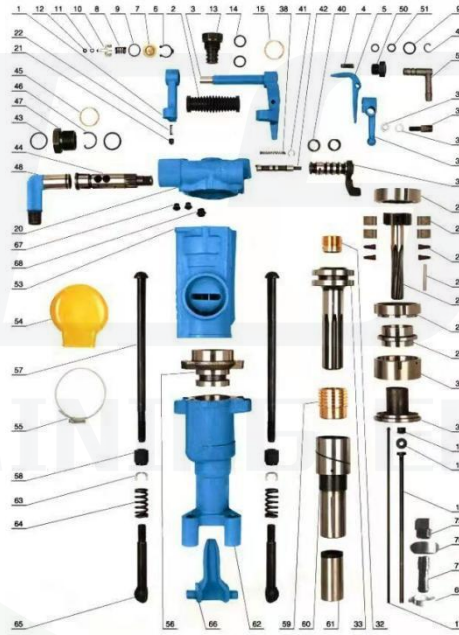
Product Description

Item 2 YT28 Air Leg Rock Drill

	Reference FOB price		Parameters	
	US \$300-580/ Set		Weight 27kg	
	Min Order		Physical size(LWH) 668X248X202mm	
	1set		Cylinder Diameter 82mm	
	Port		Piston Structure Stroke 60mm	
	Any China Port		Working Pressure 0.4-0.63MPa	
	Production Capacity		Drilling Impact Frequency $\geq 39\text{Hz}$	
	5000pieces per month		Impact Energy $\geq 78\text{J}$	
	Payment Terms		Drilling air Consumption $\leq 88\text{L/s}$	
	L/C T/T Western Union		Torque $\geq 20\text{N.m}$	
	Bit Type		Air Pipe Diameter 25mm	
	Cone Bit		Water Pipe Diameter 13mm	
	Drilling Way		Appropriate drilling Hole Diameter 34~45mm	
	Rotary		Suitable for maximum hole depth 5m	
	Power Type		Working Temperature $-30\sim 50^{\circ}\text{C}$	
	Pneumatic		Bit Shank Specification H22*108±1mm	
	Packing		FY250 Oil Injector Weight 1.2kg	
	Cartoon or wooden box		FY250 Oil Injector Oil Reserver 0.25L	

Product Description

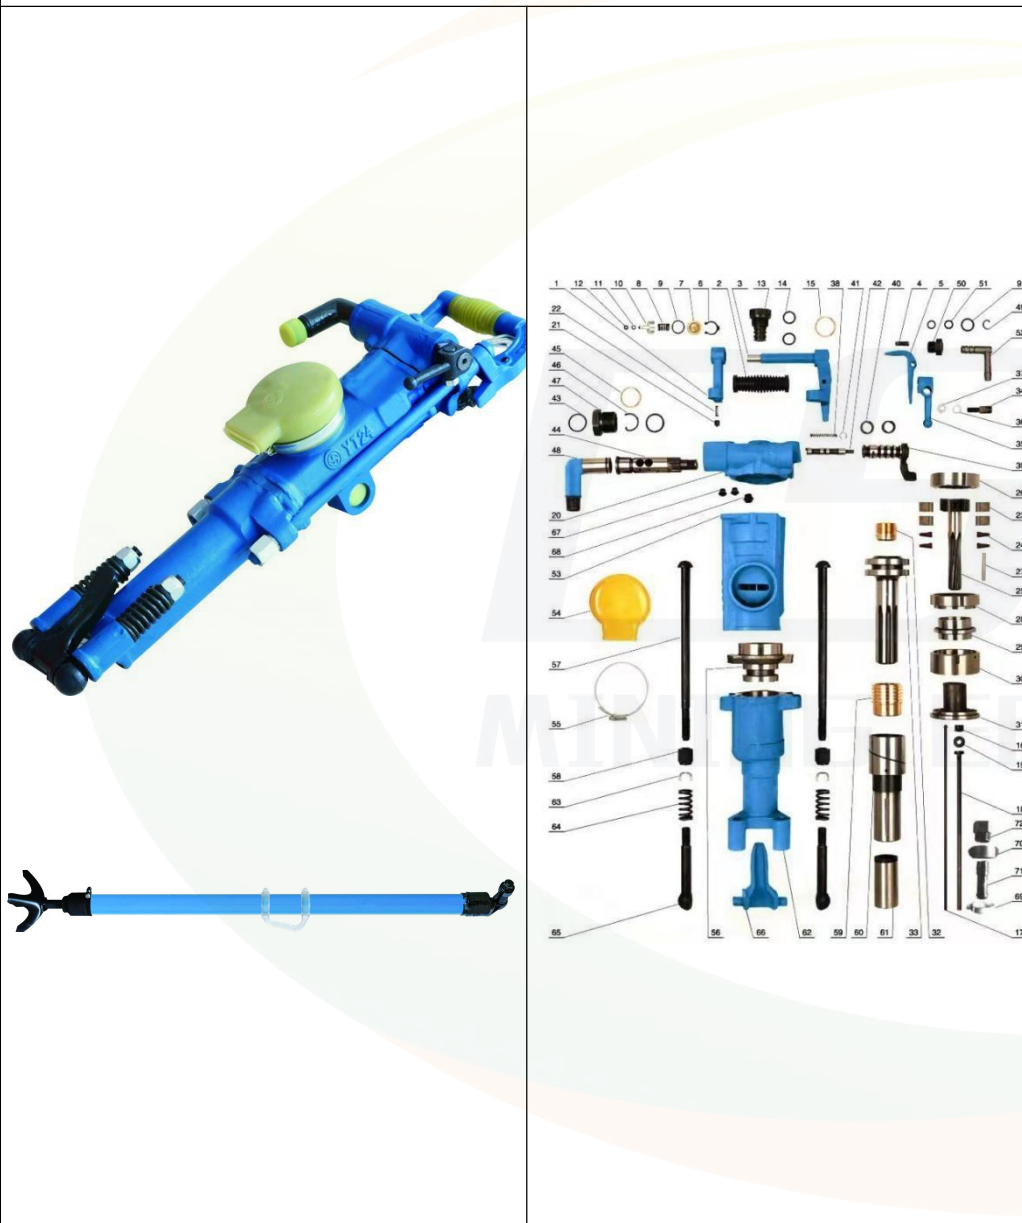
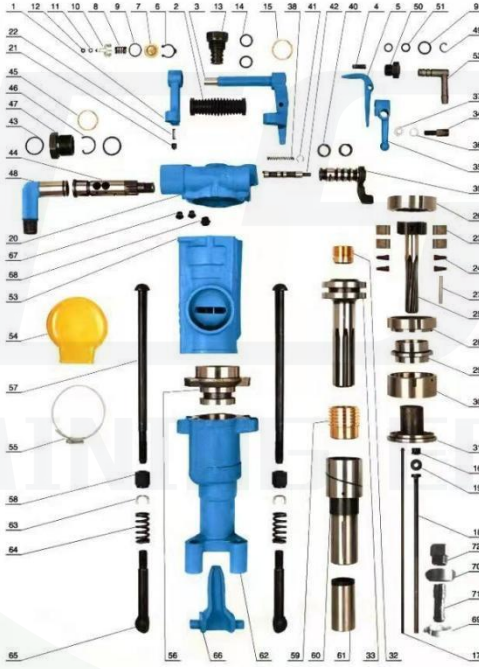
Item 3 YT29A Air Leg Rock Drill



Reference FOB price	Parameters
US \$300-580/ Set	Weight 27kg
Min Order	Physical size(LWH) 659X248X205mm
1set	Cylinder Diameter 82mm
Port	Piston Structure Stroke 60mm
Any China Port	Working Pressure 0.4-0.63MPa
Production Capacity	Drilling Impact Frequency $\geq 39\text{Hz}$
5000pieces per month	Impact Energy $\geq 78\text{J}$
Payment Terms	Drilling air Consumption $\leq 88\text{L/s}$
L/C T/T Western Union	Torque $\geq 20\text{N.m}$
Bit Type	Air Pipe Diameter 25mm
Cone Bit	Water Pipe Diameter 13mm
Drilling Way	Appropriate drilling Hole Diameter 34~45mm
Rotary	Suitable for maximum hole depth 5m
Power Type	Working Temperature $-30\sim 50^{\circ}\text{C}$
Pneumatic	Bit Shank Specification H22*108 \pm 1mm
Packing	FY250 Oil Injector Weight 1.2kg
Cartoon or wooden box	FY250 Oil Injector Oil Reserver 0.25L

Product Description

Item 4 YT24 Air Leg Rock Drill

		Reference FOB price	Parameters
		US \$240-500/ Set	Weight 24kg
		Min Order	Physical size(LWH) 659mm
		1set	Cylinder Diameter 70mm
		Port	Piston Structure Stroke 70mm
		Any China Port	Working Pressure 0.4-0.63MPa
		Production Capacity	Drilling Impact Frequency $\geq 31\text{Hz}$
		5000pieces per month	Impact Energy $\geq 65\text{J}$
		Payment Terms	Drilling air Consumption $\leq 66.7\text{L/s}$
		L/C T/T Western Union	Torque $\geq 20\text{N.m}$
		Bit Type	Air Pipe Diameter 19mm
		Cone Bit	Water Pipe Diameter 13mm
		Drilling Way	Appropriate drilling Hole Diameter 34~42mm
		Rotary	Suitable for maximum hole depth 5m
		Power Type	Working Temperature $-30\sim 50^{\circ}\text{C}$
		Pneumatic	Bit Shank Specification H22*108±1mm
		Packing	FY200B Oil Injector Weight 1.2kg
		Cartoon or wooden box	FY200B Oil Injector Oil Reserver 0.2L

Product Description

Item 5 Y19A Hand Held Rock Drill



Y19A is mainly used for drilling work in small quarries, coal mine, limestone mine, rock blast in road construction work, as well as water conservancy construction project.

Light in weight and small in size, lower air consumption, it can be used together with FT100A pusher, which is a lost cost alternative for multi-purpose drilling applications.

Reference FOB price	Parameters	
US \$148-340/ Set	<div>Weight 19kg</div> <div>Physical size(LWH) 600X534X106mm</div> <div>Cylinder Diameter 65mm</div> <div>Piston Structure Stroke 54mm</div> <div>Working Pressure 0.4-0.5MPa</div> <div>Drilling Impact Frequency $\geq 35\text{Hz}$</div> <div>Impact Energy $\geq 40\text{J}$</div> <div>Drilling air Consumption $\leq 43\text{L/s}$</div> <div>Air Pipe Diameter 19mm</div> <div>Water Pipe Diameter 13mm</div> <div>Bit Shank Specification H22*108\pm1mm</div> <div>Rotating Speed $\geq 200\text{r/min}$</div>	
Min Order		
1set		
Port		
Any China Port		
Payment Terms		
L/C T/T Western Union		
Bit Type		
Cone Bit		
Drilling Way		
Rotary		
Power Type		
Pneumatic		
Packing		
Cartoon or wooden box		

Product Description

Item 6 Y24 Hand Held Rock Drill



Y24Pneumatic hand-held rock drill suitable for either drilling downward or incline of blast holes in medium hard rock(f=8-18),or for second blasting operation. Centrally grouped control, nimble starting, stable running and easy maintenance.

Reference FOB price	Parameters	
US \$158-360/ Set		
Min Order	Weight	24kg
1set	Length	604mm
Port	Cylinder Diameter	70mm Piston
Any China Port	Structure Stroke	70mm
Payment Terms	Working Pressure	0.4-0.63MPa
L/C T/T Western Union	Drilling Impact Frequency	≥30Hz
Bit Type	drilling Diameter	34~42mm Impact
Cone Bit	Energy	≥40J
Drilling Way	Drill depth	5m
Rotary	Drilling air Consumption	≤50L/s
Power Type	Air Pipe Diameter	19mm
Pneumatic	Water Pipe Diameter	13mm
Packing	Bit Shank Specification	H22*108±1mm
Cartoon or wooden box	Rotating Speed	≥200r/min

Product Description

Item 7 Y26 Hand Held Rock Drill



Hand held Rock Drill Model Y26 is mainly used for drilling, second blasting and other works in mines, railway, and water conservancy projects. It is designed for both dry and wet rock drilling on hard and medium hard rocks, and drilling vertical down or declined blast hole.

Reference FOB price	Parameters
US \$224-430/ Set	
Min Order	Weight 26kg
1set	Physical size(LWH) 654X247X195mm
Port	Cylinder Diameter 65mm
Any China Port	Piston Structure Stroke 70mm
Payment Terms	Working Pressure 0.4MPa
L/C T/T Western Union	Working Water Pressure 0.2-0.3MPa
Bit Type	drilling Diameter 34~42mm
Cone Bit	Drilling Impact Frequency $\geq 27\text{Hz}$
Drilling Way	Impact Energy $\geq 30\text{J}$
Rotary	Drill depth 5m
Power Type	Drilling air Consumption $\leq 50\text{L/s}$
Pneumatic	Air Pipe Diameter 19mm
Packing	Water Pipe Diameter 13mm
Cartoon or wooden box	Bit Shank Specification H22*108 \pm 1mm
	Rotating Speed 280r/min